
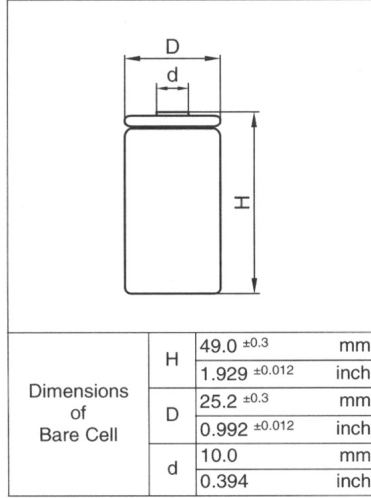


SANYO

Cadnica

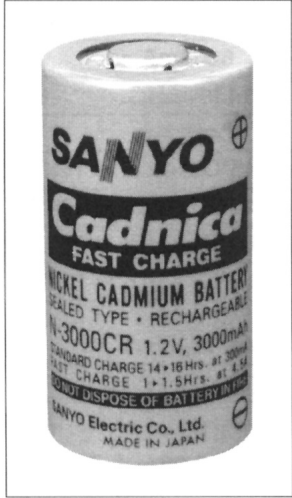


Cell Type N-3000CR

Specifications


Nominal Capacity		3000mAh	
Nominal Voltage		1.2V	
Charging Current	Standard	300mA	
	Fast	4500mA	
Charging Time	Standard	14 to 16Hrs.	
	Fast	about 1Hr.	
Ambient Temperature	Charge	Standard	0 to 45 °C [32 to 113 °F]
		Fast	5 to 40 °C [41 to 104 °F]
	Discharge		-20 to 60 °C [-4 to 140 °F]
	Storage		-30 to 50 °C [-22 to 122 °F]
Internal Impedance(Av.) (at 50% discharge)		3.4mOhms (at 1000Hz)	
Weight		84g/2.96oz	
Dimensions(D)x(H) (with tube)		25.8 ⁰ ₋₁ x 50 ⁰ ₋₁ mm 1.02 ⁰ _{-0.04} x 1.97 ⁰ _{-0.04} inch	

Typical Characteristics


Charge (5 cells pack)

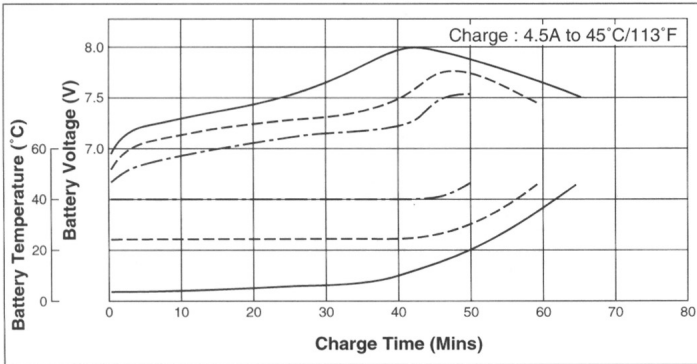


Discharge (at high rate)

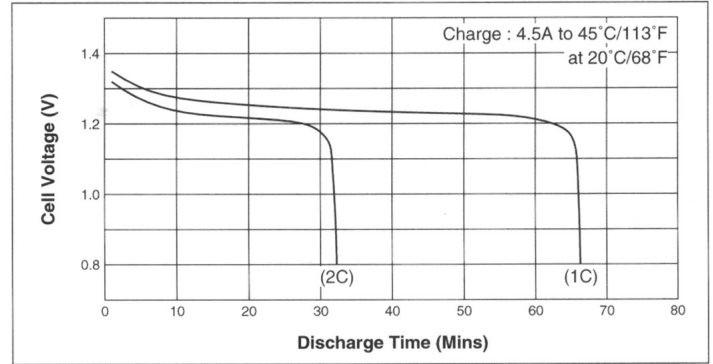


Cell Capacity (at various discharge rate)

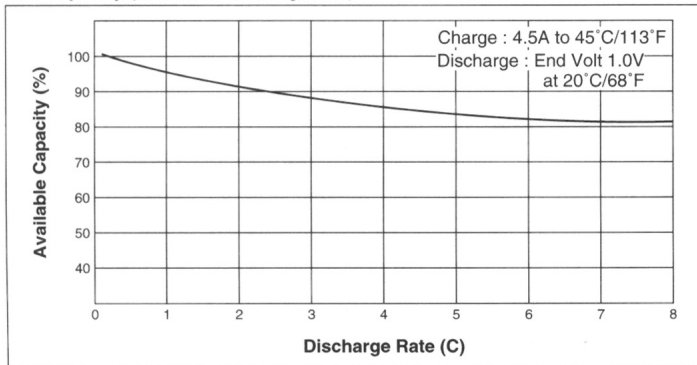

Discharge (at high rate)

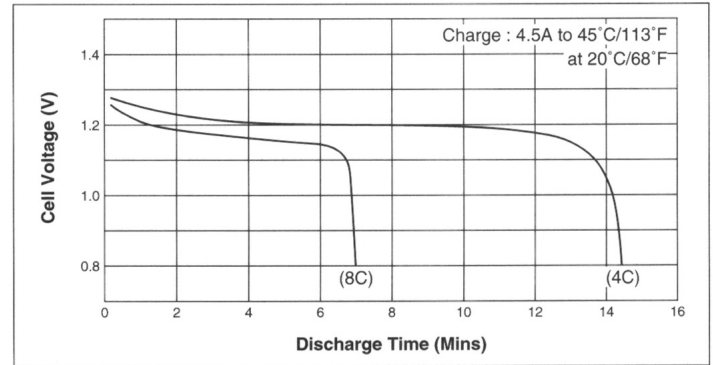

Discharge (at low rate)

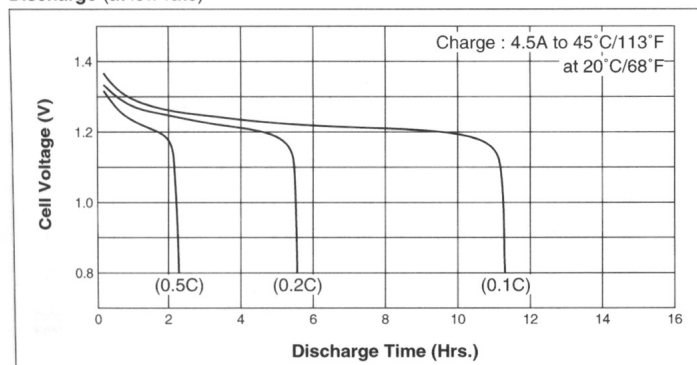

Temperature (Charge & Discharge)

